

SECURITRON


MODEL 32 ELECTROMAGNETIC LOCKS

- Instant release circuit—no residual magnetism.
- Surface mounts easily with minimum of tools.
- Fully sealed electronics—tamper proof & weather proof.
- Mounted using steel machines screws into blind finishing nuts.
- Architectural brushed stainless steel finish (US32D/630).
- All ferrous metal surfaces plated to MIL specification.
- Ten feet (3.05m) of jacketed, stranded conductor.
- **UL Listed.**

Model 32 provides 600 pounds "traffic control" security—similar to electric strikes—and is recommended for applications where physical assault on the door is not expected, like access controlled interior rooms and secure areas within buildings. Primary benefits of this model are its lower cost and more compact size. Please specify voltage in 12 or 24 VDC when ordering. **Current Draw and Voltage:** 300mA at 12VDC; or 150 mA at 24 VDC. **Dimensions:** 32 magnet—8"L x 1-7/8"W x 1-1/2"H. 32 strike—6-1/4"L x 1-5/8"W x 1/2"H.

SECURITRON

MAGNACARE
LIFETIME REPLACEMENT WARRANTY

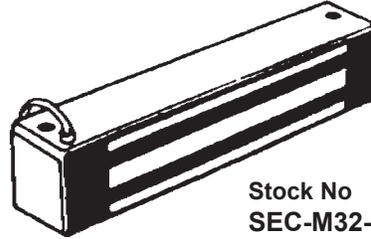


Stock No	Description
SEC-M32-12	12 volts
SEC-M32-24	24 volts

MODEL 62 ELECTROMAGNETIC LOCKS

- Instant release circuit—no residual magnetism.
- Surface mounts easily with minimum of tools.
- Fully sealed electronics—tamper proof & weather proof.
- Mounted using steel machines screws into blind finishing nuts.
- Architectural brushed stainless steel finish (US32D/630).
- All ferrous metal surfaces plated to MIL specification.
- Ten feet (3.05m) of jacketed, stranded conductor.
- Automatic dual voltage—no field adjustment required.
- **UL Listed.**

Model 62 increasing holding power to 1200 pounds, appropriate for exterior and perimeter doors through which criminals could gain entrance to cause substantial economic loss. Entry cannot be forced without special tools, or before the door and frame actually give way. Model 62 is also available with the "G" option (special order), which adds a universal conduit for fitting for outdoor installations or surface-wired installations on concrete filled door frames. **Current Draw and Voltage:** 250mA at 12VDC; or 125 mA at 24 VDC. **Dimensions:** 62 magnet—8"L x 1-3/4"W x 3"H. 62 strike—6"L x 1-1/2"W x 2-3/4"H.




MAGNACARE
LIFETIME REPLACEMENT WARRANTY



Stock No	Description
SEC-M62	Standard Model 12/24VDC
SEC-M62F*	Face Mount Model 12/24VDC

*For doors that swing into the protected area security considerations may dictate the lock mounts on the in-swinging side of the door. The "F" option provides for face mounting on the header above the door. Mounting holes are drilled through the magnet face, and wire exits the rear. The SEC-Z-62 is normally used with "F" Magnalocks.



SENSTAT—(Special Order) The lock monitors itself!! The Senstat option provides a lock status sensing signal which positively indicates that the door is secure. This interfaces with access control or alarm systems and is superior to the commonly used door position switch which indicates that the door is closed but not that it is secure. All Senstat Magnalocks use Form "C" isolated contacts.

MAGNACARE
LIFETIME REPLACEMENT WARRANTY

Features: *Lifetime*—the warranty does NOT expire; *No Fault*—The product will be replaced by Securitron forever for any reason, including but not limited to installation error, vandalism or act of God. *Tomorrow*—Replacement product is shipped next day air at Securitron's expense if needed.

Benefits: Magnacare covers all products Securitron manufacturers. No product registration is required, if you have the product you have the warranty.

See page 214 for full terms and conditions of MagnaCare.

©ZIPF LOCK COMPANY

210
(PL-12)

NOTE: We are phasing out the stocking of Securitron products. We will still be able to special order.

SECURITRON

MAGNALOCK ACCESSORIES



Limited Supply




Stock No. **Description** **Discontinued. Call for closeout prices.**

SEC-SFP- Stop Filler Plate

Specify Thickness: 1/4, 3/8, 1/2 or 5/8

Used in installations where only part of the magnet body is on the stop. The plate extends the stop to provide a flat mount surface for the magnet. Plates are 8"L x 1-1/4"W.




Stock No. **Description**

SEC-CWB-32-BK For Model 32

SEC-CWB-62-BK For Model 62

The Concrete/Wood Frame Bracket is used on concrete filled or wood door frames. On concrete fill frames the bracket anchors to the frame using sheet metal screws; the magnet mounts to the bracket with machine screws. The bracket includes a central splice area, avoiding the need to drill a wireway through the concrete. On wood frames, 4" wood screws penetrate into the header.

Discontinued. Call for closeout prices.




Limited Supply

Stock No. **Description**

SEC-GDB Glass Door Bracket

The glass door bracket permits Magnalock installation on a solid glass door. The bracket is permanently bonded to the glass with a special adhesive (special order). The strike plate then screws into the bracket, as glass doors cannot be drilled.

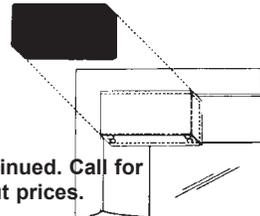

Discontinued. Call for closeout prices.


Stock No. **Finish**

SEC-DC-62BK Black

Dress cover for M62 Magnalock installs in seconds using structural form adhesive. The cover improves the appearance of the installation by concealing the lock.

INSTALLATION KIT FOR MAGNALOCKS

Special Order




SEC-IK

Stock No. **Description**

SEC-IK Installation Kit

The official factory installation kit makes any installation quicker and more accurate. It even includes an educational, step-by-step system installation video! Here is what is included: Heavy duty drill guide, Blind nut placement tool, Handle socket driver, SB-1 sex bolt, Model 62.82 hardware pack, Model 32 hardware pack, SAM hardware pack w/brackets (on request), Rubber washers, Flat washer, insulated crimp connector, thread lock, 1/8" cobalt, 3/8" cobalt drill bit, 3/8" carbide drill bit, 1/2" high speed drill bit, socket cap screws, wood screws, blind nuts, lock nuts, finish caps, installation video.

TOUCH SENSE



Stock No **Description**

SEC-SP-1 Touch Sense Plate

The SEC-SP-1 uses touch sensing technology to create a push panel with no moving parts. For indoor use only, the unit is oversized so that it can be mounted over a single gang cutout. A three part vinyl decal is included to provide the appropriate prompt to the user and a red LED is incorporated in the backbox. For ADA compliant systems, an optional decal (special order) with handicap symbol is available (SP-1LH). 12 or 24 VAC or VDC, 40 mA at rest 25 mA releasing, 5-3/4" x 3-3/16" x 1-1/2", DPST 2 amp rated relay, internal timer, built in redundant button, internal 25 second timer.

©ZIPF LOCK COMPANY

NOTE: We are phasing out the stocking of Securitron products. We will still be able to special order.

211 v1
(PL-12)