




KNOBS, ROSES & SPINDLES



198-04-51
Replacement knobs. "Traditional Design." Visual box pack. Satin Brass.




197-03-51
Replacement knobs. "Colonial Design." Visual box pack. Bright Brass.



199-03-51
Replacement knobs. "Crystal Design." Visual box pack. Bright Brass Hardware.


—KNOBS AND KNOB SETS—



Stock No. **Finishes**
PG-2600 US-3, 26D

Solid Brass, 2-1/4" replacement knob set. Case hardened double set screws and supplied with 3-1/2" straight spindle. Packed one pair in display box. Standard thread is 20 TPI.

SOLID BRASS REPLACEMENT DOOR KNOB ROSES

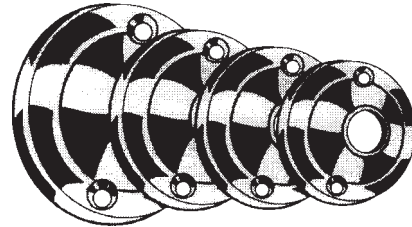


Stock No.	Finish	Description
PG-206	US-3	2-1/4" Solid brass rose
PG-208	US-3	3" Solid brass rose

Packaged one pair per poly bag with header for hanging.

—SOLID BRASS OVAL/ROUND PLATE—



Stock No. **Finish**
PG-75 US-3, 26D
Solid brass oval plate with bit key hole. 1-3/4" x 1-1/8" oval escutcheon. Packaged two plates per poly bag.




Stock No. **Finish**
PG-76 US-3
Solid brass oval plate with thumb turn. 1-3/4" x 1-1/8" oval escutcheon. Turn piece has 3/16" square tail. Packaged one per poly bag.

TRIM PLATES



Stock No. **Finish**
IL-213-04-51 Satin Brass
Wrought Steel construction. Plate measures: 7" x 2-1/4". Key to spindle hub measures: 2-1/4" (centers). 2 per package. Sold by the package.

SCAR PLATES




3-1/2" O.D.

Stock No. **Finish**
DJ-SP135 605, 609, 630
Scar plate used to convert 2-3/8" to 2-3/4" backset. Fits under rose of key-in-knob or deadbolt locks.

KNOBS, ROSES & SPINDLES


—SOLID BRASS TRADITIONAL BROAD BEVEL PLATE— 7" x 2-1/4"

PROGRESSIVE
HARDWARE CO., INC.




Stock No. Finish
PG-2000 US-3

Knob bearing and key slot.
Standard distance between
holes is 2-1/4"



Stock No. Finish
PG-2001 US-3, 4


Knob bearing only.



Stock No. Finish
\$PG-2002 US-4, 26D

Knob bearing and cylinder
hole. Standard distance be-
tween holes is 3-11/16" C to
C.

\$-Discontinued.
Call for closeout
price



Stock No. Finish
PG-2003 US-3, 4

Knob bearing and turn piece.
Distance between holes is
2-7/16" C to C.

FINISHES:

US-3 Polished Brass
US-4 Satin Brass
US-26D Satin Chrome

—SOLID BRASS TRADITIONAL BROAD BEVEL PLATE— 10" x 2-3/4"

PROGRESSIVE
HARDWARE CO., INC.



\$-Discontinued. Call for
closeout price

Stock No. Finish
\$PG-2024 US-3

Push plate with four screw
holes only.

©ZIPF LOCK COMPANY

KNOBS, ROSES & SPINDLES

SOLID BRASS MARLBOROUGH PLATE 7-1/2" x 2-1/4"




**PROGRESSIVE
HARDWARE CO., INC.**

**FINISHES:
US-4 Satin Brass**

Ⓣ-Discontinued. Call for
closeout price

Stock No. Finish
\$PG-4001 US-4
Knob bearing only.

—SOLID BRASS RUSSWIN-CORBIN BROAD BEVEL PLATE— 9" x 2-1/2"

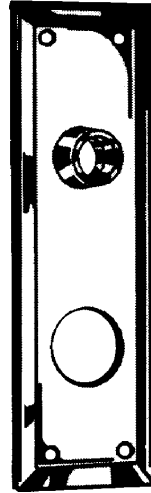

**PROGRESSIVE
HARDWARE CO., INC.**

**FINISHES:
US-3 Polished Brass**

Ⓣ-Discontinued. Call for
closeout price

Stock No. Finish
\$PG-3002 US-3
Knob bearing and cylinder hole.
Distance between holes is 3-5/8"
C to C.




Straight Spindle



Swivel Spindle



Swivel Spindle w/holes



Split Spindle

Stock No.	Spindle Type	Thickness	Length	tpi*
SP-760-14	Straight Spindle	9/32"	4-1/2"	18
SP-760-17	Swivel Spindle	9/32"	6"	18
SP-760-16	Swivel w/holes	9/32"	4-3/4"	18
SP-760-18	Split Spindle	9/32"	2-5/8"	18

*tpi - Threads per inch.

**PROGRESSIVE
HARDWARE CO., INC.**

STEEL SPINDLES WITH 10-24 TAPPED HOLES

Miscellaneous Spindles - 20 TPI



PG-45-20-RTP

20 TPI swivel spindle 9/32" square x 4-3/4" long. Two
3/8" removable centers with tapped holes 10-24.



PG-44-20-05

20 TPI swivel spindle 9/32" square x 5" long. Straight
threaded.