

# EXIT DEVICES

## NON-HANDED RIM DEVICE MO-19-R SERIES

## FALCON (Formerly Monarch)

UL Listed  
ANSI A156.3, 1994, Grade 1



The Monarch 19-R Series Rim Device meets the demand for superior panic hardware. This durable economical device is designed to meet the needs for modern touchbar styling by eliminating the need for lever arms and crossbars. This non-handed device covers a 161 cutout and may be used on 1-3/4" narrow stile aluminum doors. The "EO" (exit only) device is ready to accept any trim function pictured on next page.


**EXIT ONLY**—(Pictured above)

<b>Stock No.</b>	<b>Door Width</b>
<b>MO-19-R-EO 3'</b>	For 2' 5" to 3' 0" wide doors (Short)
<b>MO-19-R-EO 4'</b>	For 2' 11" to 4' 0" wide doors (Long)

**FINISHES:** SP28(MAL) Lacquer Sprayed Aluminum  
SP313(M13) Sprayed Duranodic

**We have a limited supply in the SP313 finish at GREAT closeout prices. Call for availability today.**

**TO ORDER, SPECIFY:** Device Stock No. and Finish.  
Trim Stock No. and Finish (if trim is needed)

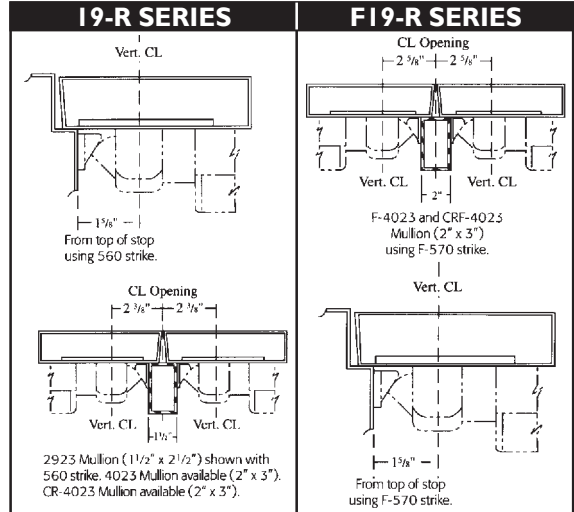

See next page for trims and accessories.

### SPECIFICATIONS:

**Hand:** Non-Handed.

**Functions:** All functions built into "EO" device. All 19 Series trim works with rim or vertical devices.

**Finishes:** SP28-Lacquer Sprayed Aluminum; SP313-Sprayed Duranodic.

**Strikes:** 560 standard.

**Latchbolt:** Stainless steel, 3/4" throw.

**Deadlocking Latchbolt:** Standard.

**Dogging Feature:** 1/2 turn cam dogging standard. No threaded parts to wear out.

**Stock Sizes:** Short—2' 5" to 3' 0" wide doors; Long—2' 11" to 4' 0" wide doors

**Doors:** 1-3/4" thick, wood or metal. Other sizes are special order only.

**Overall Length:** Short: 30-1/2", Long: 44-1/8". (19-R add 3/4" for latchbolt projected)

**Narrow Stile Door:** Must order optional strike **MO-565** x finish. Also see NOTE.

**Projection:** 2-1/2" maximum: 1-7/8" dogged.

**Fasteners:** All mounting screws are concealed. Furnished with machine screws.

**Sex Bolts:** 3-#4122 (1/4-20) SNB standard. 

**ANSI:** Certified ANSI A156.3-1994 Grade 1 standards.

**161 Cutout:** Device covers 161 cutout with KIK/KIL, Centron and Trident trims. Other trim requires cover plate.



**NOTE:** When using on narrow stile glass doors order the 4' (long) bar and cut down to size required.

### FIRE RATED SPECIFICATIONS: (Same as above unless listed below)


**Strikes:** Stainless steel, F570 standard.

**Stock Sizes:** Short—2' 5-1/4" to 3' 0" wide doors.

**Dogging:** Not available.

**Projection:** 2-1/2" maximum.

**Fasteners:** All mounting screws are concealed. Furnished with machine screws and SNB. 




# EXIT DEVICES

## TRIMS—For 19 Series


# FALCON

(Formally Monarch)



Trident Pull  
**MO-920DT\***  
(Old# 1953DT)  
SP28, SP313

\*Specify Hand:  
LHR or RHR



Trident Pull  
**MO-920NL\***  
(Old# 1955P)  
SP28, SP313



Centron Trim  
**MO-930C**  
(Old# 2302)  
SP28




Centron Trim  
**MO-930NL**  
(Old# 2305)  
SP28, SP313




T-Control  
**MO-910TP**  
(Old# 1906RVL)  
SP28, SP313



P-Control  
**MO-910NL**  
(Old# 1909)  
SP313




K-Control  
**MO-911K**  
(Old# 1907RVL)  
SP28, SP313




L-Control  
**MO-912L** LHR or RHR  
(Old# 1910RVL, 1910RR)  
SP313

Specify  
Hand



Key-in-lever  
**MO-914KIL-KD\***  
(Old# 2400KD)  
US-32D, SP313

\*Field Reversible Handing  
Cylinders included on  
MO-914 and MO-913  
Schlage C keyway



Key-in-knob  
**MO-913KIL-KD\***  
(Old# 2410KD)  
US-32D

### FUNCTION:

Keyed trims lock or unlock trim. Lever/knob/thumbturn retracts latchbolt when trim is unlocked.


### CYLINDERS NOT INCLUDED

### FINISHES:

**SP28** (MAL) Lacquer Sprayed Aluminum  
**SP313** (M13) Sprayed Duranodic  
**US-32D** Satin Stainless Steel

Trim, Strikes, Cover Plates with finishes in BOLD have limited supplies. If you don't see what you need, please contact us for availability.


## STRIKES—Specify Finish



Rim Strike  
**MO-565**  
SP28, SP313



Rim Strike  
**MO-570**  
32D




Rim Strike on  
Double Doors  
**MO-571**  
SP28, SP313

## COVER PLATES—Specify Finish



**MO-4167** SP313  
For 19 Series T and DT control



**MO-4170** SP28, SP313  
For 19 Series K, L, DT-K, DT-L  
control

## HEX KEY—



**MO-2789** 7/32" Hex key for 19 Series.