

DOOR CLOSERS

4041 SERIES DOOR CLOSER



4041 SUPER SMOOTHIE® SERIES / non handed non sized for interior or exterior use.

FEATURES: •Non sized adjustable from size 1 thru size 6 (set to size 3) •Fast Power adjust—a revolutionary visual indicator for spring power adjustment •Forged steel main arm •Ten million cycles •All weather fluid •Cast iron cylinder •Hydraulic backcheck •Non handed plastic cover •UL & cUL Listed for self closing doors without hold-open •Closers to meet ADA requirements •Tested and certified under ANSI A156.4 Grade 1 •10-year warranty.

Maximum Door Width

Stock#	EXTERIOR	INTERIOR
P4041	24" to 48"	24" to 60"

•Specify Arm: **REG** = Regular w/62PA
H = Hold open w/62PA
H-CUSH = Hold open, Cush-N-Stop




FINISHES:
ALUM or DARK BRONZE

REDUCED OPENING FORCE 4041 CLOSERS—CAUTION! Any manual door closer, including those certified by BHMA to conform to ANSI Standard A156.4, that is selected, installed and adjusted based on ADA or other reduced opening force requirements may not provide sufficient power to reliably close and latch a door.


	DOOR WIDTH	36"	42"	48"
	8.5*lbs	4041	4041	4041
	5.0*lbs	4041	4041	4041

*Maximum opening force.

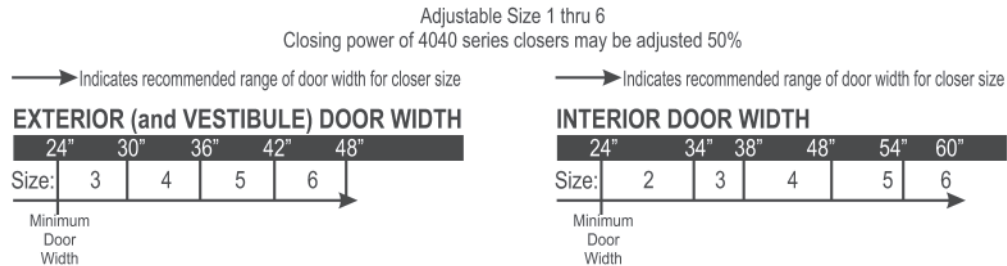

CUSH-N-STOP® ARMS / Closer, stop, holder in one arm.

FEATURES: Eliminates the need for separate stop/holder •Protects against abusive traffic and wind conditions •Hold open optional •10 year warranty •U.L. Listed •ANSI A156.4 Grade 1.

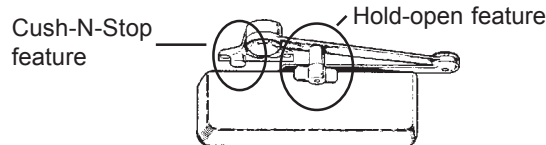

•Dead stop (and hold open) is template located at 85°, 90°, 100° or 110°. •Backcheck cushions opening swing prior to dead stop •With hold open "on" door may be pushed into and out of hold open position.

FINISHES—

STANDARD PAINTED FINISHES

ALUM- Aluminum Lacquer, BHMA No. 689

FINISH TO MATCH ARCHITECTURAL ALUMINUM HARDCOAT

DARK BRONZE- Dark Bronze Hard Coat, BHMA No. 695

DOOR CLOSERS

1260 SERIES DOOR CLOSER




1260 SERIES / non sized for interior or exterior use.

FEATURES: •Non-sized (1-5) cylinder (set to size 3 at factory) is adjustable for interior doors to 4'6" and exterior doors to 3'6"
 •Non-handed cast iron cylinder •Mounts to most common commercial footprint (3/4" x 9-1/16") •Closer meets ADA requirements
 •Adjustable hydraulic backcheck cushions opening swing prior to 90 degrees • Separate regulation of general closing speed and latching speed •Joints in arm and shoe adapt to uneven trim •UL and cUL listed for self-closing doors without hold-open
 •Tested and certified under ANSI A156.4, grade 1 •10-year warranty.


Stock#	Maximum Door Width	
	EXTERIOR	INTERIOR
1260	24" to 42"	24" to 54"

•Specify Arm: **REG** = Regular
H CUSH = Hold open, Cush-N-Stop


FINISHES:
ALUM or **DARK BRONZE**

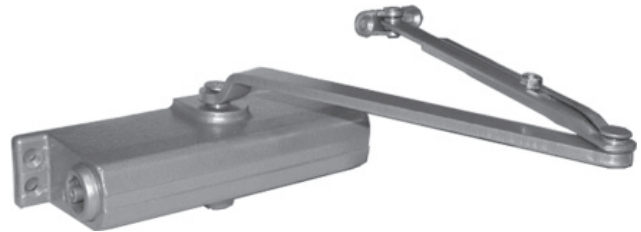

REDUCED OPENING FORCE 1260 CLOSERS—CAUTION! Any manual door closer, including those certified by BHMA to conform to ANSI Standard A156.4, that is selected, installed and adjusted based on ADA or other reduced opening force requirements may not provide sufficient power to reliably close and latch a door.


	DOOR WIDTH	36"	42"	48"
		8.5*lbs	1260	1260
	5.0*lbs	1260	1260	1260

*Maximum opening force.

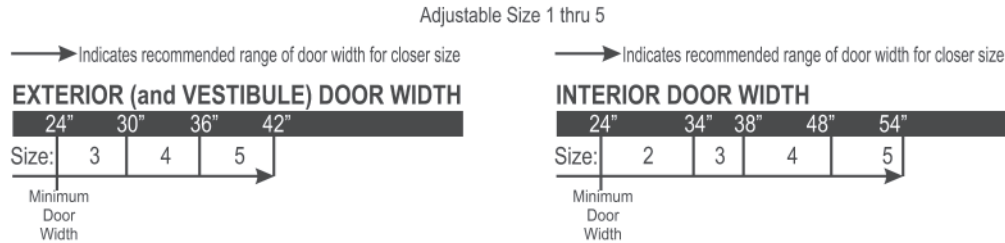

CUSH-N-STOP® ARMS / Closer, stop, holder in one arm.

FEATURES: Eliminates the need for separate stop/holder •Protects against abusive traffic and wind conditions •Hold open optional •10 year warranty •U.L. Listed •ANSI A156.4 Grade 1.

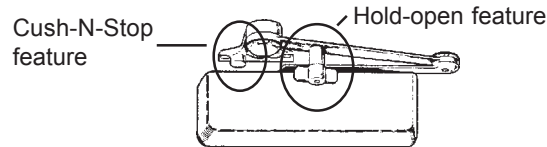

•Dead stop (and hold open) is template located at 85°, 90°, 100° or 110°. •Backcheck cushions opening swing prior to dead stop •With hold open "on" door may be pushed into and out of hold open position.

FINISHES—

STANDARD PAINTED FINISHES

ALUM- Aluminum Lacquer, BHMA No. 689

FINISH TO MATCH ARCHITECTURAL ALUMINUM HARDCOAT

DARK BRONZE- Dark Bronze Hard Coat, BHMA No. 695

DOOR CLOSERS


1461 SERIES DOOR CLOSER



1461 SUPER STOCK® SERIES / non handed, non sized for interior or exterior use.

FEATURES: •Can be mounted three different ways: 1. Hinge side, 2. Top jamb, 3. Parallel arm •PA shoe included •Non handed, non sized with spring power adjustable from size 1 through 6 (set to size 3) •Adjustable hydraulic backcheck cushions opening swing prior to 90 degrees •Cast iron cylinder •Joints in arm and shoe adapt to uneven trim •TB-Has thru bolts & machine screws •Slim Line plastic cover •UL & cUL listed for self closing doors without hold open •Tested and certified under ANSI A156.4 Grade 1 •10 year warranty

		Maximum Door Width	
Stock#		EXTERIOR	INTERIOR
P1461		24" to 48"	24" to 60"
•Specify Arm:	REG	= Regular w/62PA	
	H	= Hold open w/62PA	

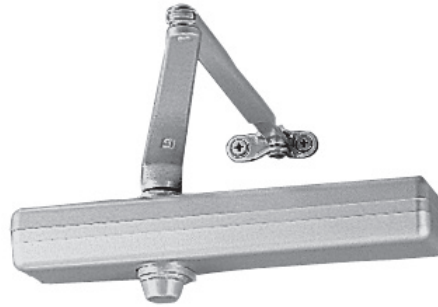


FINISHES: ALUM or DARK BRONZE

REDUCED OPENING FORCE 1460 CLOSERS—CAUTION! Any manual door closer, including those certified by BHMA to conform to ANSI Standard A156.4, that is selected, installed and adjusted based on ADA or other reduced opening force requirements may not provide sufficient power to reliably close and latch a door.

	DOOR WIDTH	36"	42"	48"
	8.5*lbs	1461	1461	1461
	5.0*lbs	1461	1461	1461

*Maximum opening force.

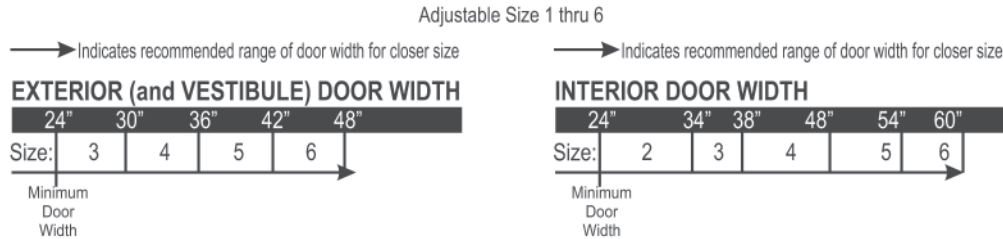

FINISHES—

STANDARD PAINTED FINISHES

ALUM- Aluminum Lacquer, BHMA No. 689

FINISH TO MATCH ARCHITECTURAL ALUMINUM HARDCOAT


DARK BRONZE- Dark Bronze Hard Coat, BHMA No. 695

If you don't see the LCN closer you need please contact us. We have access to many LCN closers and with quick delivery.


DOOR CLOSERS

DOOR CLOSER MOUNTING HOLE SPACINGS (NOT TO SCALE)


CAL-ROYAL 300 SERIES



CAL-ROYAL 400 SERIES




CAL-ROYAL 700 SERIES



CAL-ROYAL 900 SERIES




CAL-ROYAL 441 SERIES

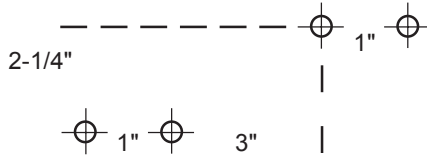


CAL-ROYAL 801 SERIES




CORBIN/RUSSWIN RE-2210, RE-3210




CORBIN/RUSSWIN RE-4612, 13, 14, 15




KWIKSET KW-962 & 963




LCN 1260 SERIES



LCN P1461 SERIES



LCN P4041

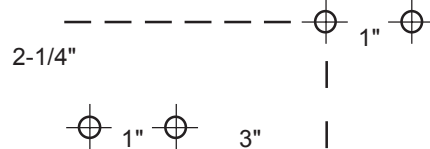

**If you don't see it in our catalog, please contact us today.
We have many others sources for products.**

©ZIPF LOCK COMPANY

Specifications subject to change without notice.

305 v1
(PL-23)