

MISCELLANEOUS

POCKET DOOR LOCKS & PULLS



Sliding Door Edge Pull

- 3/4" width allows installation on narrow as well as standard doors.
- Spring automatically returns lever flush with plate.
- Made from solid brass.
- Conforms to design requirements of ANSI/BHMA A156.14 D2801.
- Dimensions: 3-7/8" H x 3/4" W

Stock No. (Specify Finish)

IV-230B

Finishes: 3, 10, 10B, 15, 15A, 26, 26D



Round Pocket Door Lock


- Fits standard 2-1/8" prep.
- Installs in minutes.
- Auto Catch Lock Mechanism.
- Lifetime Mechanical Warranty.
- Lifetime Finish Warranty.

Stock No. Description

KW-334 Passage

KW-335 Privacy

Specify Stock No. and Finish.

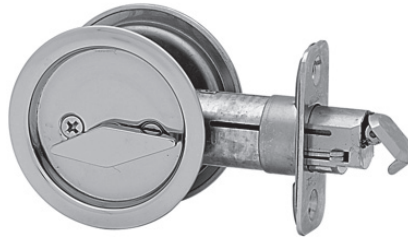

SPECIFICATIONS

DOOR THICK: 1-3/8" to 1-3/4"

BACKSET: 2-3/8"

BORE: 2-1/8" x 1"

FINISHES:

US-3 (605)	Polished Brass
US-5 (609)	Antique Brass
US-10B (613)	Oil Rubbed Bronze
US-15 (619)	Satin Nickel
US-15A (620)	Antique Nickel
US-26D (626)	Satin Chrome
US-32 (629)	Bright Stainless Steel

STORM DOOR LOCKS



Storm Door Latch


- For wood storm doors 7/8" to 1-1/8" thick.
- Reversible: fits right or left hand, inswinging or outswinging doors.
- Security lock feature operates from inside rose.
- Solid brass safety strike assures latching and is designed to compensate for air pressure build-up between doors.
- Made from wrought brass.
- Dimensions:
 - Backset: 1-3/4"
 - Rose Diameter: 1-7/8"
 - Knob Diameter: 1-3/4"
 - Knob Projection: 2"
 - Lever Length: 1-3/4"
 - Lever Projection: 1-7/8"



Stock No. (Specify Finish)

IV-980B

Finishes: 3, 5, 10B, 15, 26, 26D, 716




V666



TULIP KNOB LATCH

- For outswinging wood or metal doors.
- Fits doors 7/8" to 1-1/8" thick.
- Installation hole spacing 3".
- Installs in three 1/4" holes.
- Backset from jamb (door stop) 1".

- Installs with spring loaded strike plate.
- Covers most previous installation drillings in door.



V777

TULIP KNOB LATCH

- For outswinging wood or metal doors.
- Fits doors 7/8" to 1-1/8" thick.
- Installation hole spacing 1-3/4".
- Installs in three 1/4" holes.
- Backset from jamb (door stop) 7/8".
- Installs with spring loaded strike plate.



©ZIPF LOCK COMPANY


See page 446 for Cal Royal, Don Jo, Ives finish descriptions.

SUPER SPECIAL PRICING AVAILABLE ON ITEMS MARKED WITH ■ - SUPPLIES LIMITED - PLEASE INQUIRE.

443v1
(PL-42)

MISCELLANEOUS

STORM DOOR LOCKS



Wright
PRODUCTS

V1000

PUSH-PULL LATCH

- For wood or metal doors.
- Fits outswinging doors 7/8" to 1-3/8" thick.
- Installs with 1" diameter hole-no mortising.
- Backset 13/16" from jamb (door stop).
- Pull to open from outside, push to open from inside.

STORM DOOR CLOSERS



Wright
PRODUCTS


V1020 Aluminum Finish
V1020BL Black Finish

PNEUMATIC DOOR CLOSER

- For outswinging wood or metal doors.
- Full 90° opening.
- Two hole end plug for summer or winter adjustable latching power.
- Adjustable closing speed.
- Factory lubricated.
- Internal spring for prevention of rod bending.
- Replacement cover plate furnished to cover old door bracket installation holes.

TRAILER LOCKS

CompX
FORT



TL-37 KD Key Different
TL-37 KA 1339 Keyed Alike 1339
5000 series double bitting, 6 tumbler, key retaining in unlocked position, solid die cast construction. Key blank: K750. 90° key rotation

SPARE TIRE LOCKS




Master Lock

262DAT
Spare tire lock, lug nut style. Ideal for locking spare tires on RV's, truck, etc.

ARMOR LOCK



CLASS III/IV RECEIVER HITCH LOCK 5/8" PIN & SNAP-ON RECEIVER LOCK

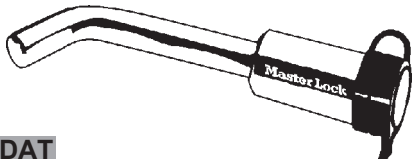

Master Lock

375DAT
5/8" pin fits standard 2" receiver tube. Nickel-plated, hardened steel pin resists corrosion and provides strong cut and shear resistances. The lock body snaps (and locks) onto the receiver pin for fast and trouble-free application. The pin tumbler mechanism offers maximum pick resistance while the solid brass keyway and vinyl cover allows for extended weather protection.

Armored hardened steel shackle defies cutting. 1-3/4" laminated steel body for superior strength. 4-pin tumbler cylinder helps prevent picking. Shackle guard protects against bolt cutters and hacksaws. Shackle fits openings 1/2" diameter or larger; shackle guard removable to accommodate openings 9/32" diameter. Clearances: vertical 15/16", horizontal 7/16". Ideal for securing trailers, cables and chains. 2 keys.

Keyed Alike*
37 KA 15/16" vertical clearance.

*KEYED ALIKE NUMBERS STOCKED:
37 KA: 3383.

UNIVERSAL TRAILER COUPLER LOCK



Master Lock

377DAT
Universal coupler lock fits 1-7/8" and 2" ball diameters of the following coupler brands: Reese®, Fulton, Valley, Attwood®, Putnam, Marvel, Ideal, Acme, Dutton-Lainson and UFP. Easy to install and remove. Resists rust and corrosion. Guards against trailer towaway theft.

SOLID RECTANGULAR BRASS TRAILER COUPLER LOCK

Master Lock



605DAT
2-1/4" solid brass coupler lock with anti-sawing pin for maximum protection. Case-hardened steel shackle resists cutting and sawing. Solid brass case resists corrosion. Precision pin tumbler mechanism for superior pick resistance.

444 v1
(PL-42)

See page 446 for Cal Royal, Don Jo, Ives finish descriptions.
SUPER SPECIAL PRICING AVAILABLE ON ITEMS MARKED WITH ■ - SUPPLIES LIMITED - PLEASE INQUIRE.