

DOOR STOPS & BUMPERS

See page 321 for finish descriptions.


CAL-ROYAL



CR-DH25
US3, 26D
4" Zinc Diecast Drop
Down Door Holder



CR-SBDH5
US3, 10, 10B
5" Solid Brass Kick
Down Door Holder.
Base 7/8" x 1-3/4"
(Ives #455)

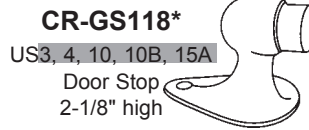


CR-GS118*
US3, 4, 10, 10B, 15A
Door Stop
2-1/8" high

*w/hanger bolt & wood screw; stud w/
expansion shield; Machine Screw & anchor



CR-GS119*
US3, 4, 10, 10B,
15, 15A



Door Stop
2-7/8" high

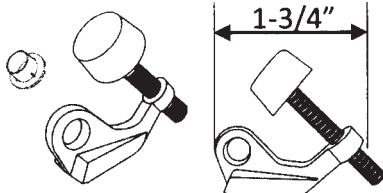


CR-DSLD81
US-3, 5, 10B, 15, 26D
Residential (light duty) Hinge Pin Stop
w/nylon bushing.




CR-HP95
US-3, 5, 15, 15A, 26
Hinge Pin Stop w/nylon
bushing.



CR-JHP11
US-3, 5, 10B, 15, 15A, 26
Jumbo Hinge Pin Door Stop
w/nylon bushing.

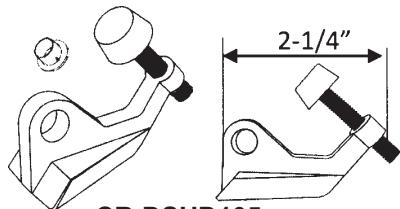

CR-DSHD105
US-3, 5, 10B, 15, 15A
Commercial (heavy duty) Hinge Pin
Stop w/nylon bushing.



CR-FS89
US3, 5, 15, 15A
3" Flexible Door Stop with
fixed screw. Die cast base,
One piece style.



CR-RS92
US3, 5, 10B, 15, 15A, 26,
26D
3" Cast Rigid Door Stop
w/molded screw




CR-SBRS3
US3, 10B, 15, 15A, 26
3" Solid Brass Rigid
Door Stop
(Ives #64)




CR-SOFS3
US3, 5, 10B, 15, 15A
3" Heavy Duty Flexible
Snap on Door Stop-3 pcs
(Ives #060)



CR-HDFS3
US3, 5, 10B, 15, 15A, 26
3-1/8" Heavy Duty Flexible Door
Stop with screw and metal base



DJ-1490
Finishes: 605, 613, 626
Material: Cast Brass. 3-3/4" projec-
tion. Fastener: WS, MS, & Plastic
Anchors.



DJ-1492
Finishes: 626
Material: Cast Brass. 3-3/4" projec-
tion. Fastener: WS, MS, Exp Shield.

DON-JO




DJ-1508
Finishes: 605, 609, 619, 620, 625
Spring Base. 3" projection.

©ZIPF LOCK COMPANY

DOOR STOPS & BUMPERS

See page 321 for finish descriptions.

DON-JO




DJ-1430

Finishes: 605, 613, 619, 620, 626
Material: Cast Brass. Base: 1-1/4", Height: 1-5/16"




DJ-1432

Finishes: 605, 613, 619, 620, 626
Material: Cast Aluminum. Base: 1-1/4", Height: 1-5/16". ANSI L32181.




DJ-1440

Finishes: 605, 613, 619, 620, 625, 626
Material: Cast Brass. Low Style. 1/4" h x 1-5/8" diam. base. Fastener: WS, MS, Exp. Shield & Plastic Anchor. ANSI L12141.




DJ-1442

Finishes: 605, 613, 620, 625, 626
Material: Cast Brass. High Style. 1/2" h x 1-5/8" diam. base. Fastener: WS, MS, Exp. Shield & Plastic Anchor. ANSI L12161.




DJ-1443

Finishes: 605, 613, 626
Material: Cast Brass. 1" h x 3/16" base thickness. Fastener: WS, MS, Exp. Shield & Plastic An-chor. ANSI L02141.




DJ-1444

Finishes: 605, 613, 626
Material: Cast Brass. 1-3/8" h x 1/2" base thickness. Fastener: WS, MS, Exp. Shield & Plastic Anchor. ANSI L02161.




DJ-1448

Finishes: 605, 613, 626
Material: Cast Brass. 1-5/8" projec-tion. 2-1/4" x 1-5/8" base. Fastener: W/S & Exp. Shield.




DJ-1449

Finishes: 605, 613, 626
Material: Cast Brass. 2-1/2" projec-tion. 2-1/4" x 1-5/8" base. Fastener: W/S & Exp. Shield.



DJ-1450

Finishes: 605, 613, 626
Material: Cast Brass, Projection: 2-1/8", Base: 2-5/8" x 1-5/8". Fastener: W/S & Exp. Shield. ANSI L12131





DJ-1452

Finishes: 605, 613, 626
Material: Cast Brass. Projection: 2-3/4", Base: 2-1/4" x 1-1/4". Fastener: W/S & Exp. Shield. ANSI: L12131.


DJ-1471

Finishes: 605, 613, 626
Material: Cast Brass. 2-1/4" base, 3" projection. Fastener: WS, MS, Exp. Shield & Plastic Anchor. ANSI L12131.




DJ-1473

Finishes: 605, 613, 626
Material: Cast Brass. 2-1/4" base, 3" projection. Fastener: WS, MS, Exp. Shield & Plastic Anchor. ANSI L11371.



DJ-1475

Finishes: 605, 613, 626
Material: Cast Brass. 2-1/4" base, 3-1/2" projection. Fastener: WS, MS, Exp. Shield & Plastic Anchor. ANSI L12021.



DJ-1477


Finishes: 605, 613
Material: Cast Brass. 2-1/4" base, 3-1/2" projection. Fastener: WS, MS, Exp. Shield & Plastic Anchor. ANSI L11351.

©ZIPF LOCK COMPANY

DOOR STOPS & BUMPERS

See page 321 for finish descriptions.


DON-JO



DJ-1455

Finishes: 626, **BP**

Material: Cast Aluminum. 4" projection.
Fastener: Sheet metal screws. ANSI L11382.



DJ-1465

Finishes: 626

Material: Solid Brass. 4" projection. Fastener: Sheet metal screws. ANSI L11382.



DJ-1507


Finishes: 613, 619

Door hinge stop. Works with 3" and 3-1/2" residential hinges. Stop will not damage the door or trim. The stop only makes contact with the hinge. Hinge stop has multiple adjustments door opening.



DJ-1468

Rubber replacement tip for DJ-1455, 1465.



DJ-1467

Finishes: 605, 626


Material: Solid Brass. 5" projection. Fastener: Sheet metal screws. ANSI L11382.



DJ-1412

Finishes: 605, 613, 626

Material: Cast Brass. Diameter: 2-1/2". ANSI L12101. Fastener: Plastic Anchor & Plastic Dry Wall Anchor.



DJ-1413

Finishes: 605, 626


Material: Cast Brass. Diameter: 2-1/2". ANSI L12251. Fastener: Plastic Anchor & Plastic Dry Wall Anchor.



DJ-1400

Finishes: 605, 613, 625


Material: Cast Brass. Diameter: 1". ANSI L12101. Fastener: Anchor & screw.



DJ-1401

Finishes: Gray


Material: Rubber. Diameter: 1-13/16". Fastener: Adhesive.



DJ-1402

Finishes: 626


Material: Solid Brass. Diameter: 1-1/2". Fastener: SMS & Plastic Anchor & Toggle.



DJ-1406

Finishes: 605, 613, 625, 630

Diameter: 2-1/2", Convex Design. Material: Wrought. ANSI L22101, L52101. Fastener: Plastic Anchor & Plastic Dry Wall Anchor.



DJ-1407

Finishes: 605, 613, 620, 625, 630

Diameter: 2-1/2", Concave Design. Material: Wrought. ANSI L22251, L52251. Fastener: Plastic Anchor & Plastic Dry Wall Anchor



DJ-1410

Finishes: 626

Material: Cast Brass. Diameter: 3-7/8". Fastener: M/S & Expansion Shield.

©ZIPF LOCK COMPANY

SUPER SPECIAL PRICING AVAILABLE ON ITEMS MARKED WITH ■ - SUPPLIES LIMITED - PLEASE INQUIRE.

DOOR STOPS & BUMPERS

See page 321 for finish descriptions.

DOOR STOPS (Residential)—



Flexible Door Stops

Features:

- Utilizes heavy gauge spring to maintain rigid protections.
- Simple to install - only a screwdriver required.
- Rubber tip is replaceable (special order).
- Made from burnished wrought steel.
- Meets design requirements of ANSI/BHMA A156.16.
- Packed disassembled for quick installation.
- Projection: IV-060 3"; IV-061 4".



Stock No. (Specify Finish)

IV-060F 3" Projection

Finishes: 3, 5, 10, 10B, 15, 26D

IV-061F 4" Projection

Finishes: 3, 5, 10, 10B, 14, 26D

Base Door Stops

- Rubber tip is replaceable (special order).
- Projection: 3-1/8" on brass units. 3-3/16" on aluminum units.
- Made from solid brass, or aluminum.



Stock No. (Specify Finish)

IV-61A 3-3/16" Projection - Alum

Finishes: 3, 5, 10, 10B, 14, 15, 92, 716, W

IV-61MB 3-1/8" Projection - Brass

Finishes: 3, 5, 10, 10B, 15, 15A, 26, 26D

Hinge Pin Door Stop

- For use on hinged doors where the installation of a standard door stop is not desirable.
- Positive slip proof adjustment.
- Non-marring rubber tips.
- Removable bushings accommodate 1/4" to 5/16" diameter hinge pins.
- Easy installation - only a screwdriver required.
- Made from burnished wrought steel.
- Door Openings Adjustments: From 70° to 100°.



Stock No. (Specify Finish)

IV-69F 70° to 100° opening

Finishes: 3, 5, 10B, 14, 15, 15A

Hinge Pin Door Stop

- For use on hinged doors where the installation of a standard door stop is not desirable.
- Designed for narrow trim installation.
- High quality rubber bumpers - shoulder on stud supports rubber through entire body for engineered cushioning.
- Replaceable, non-marring rubber tips (special order).
- Removable bushings accommodate 1/4" to 5/16" diameter hinge pins.
- Easy installation.
- Made from solid brass, aluminum or epoxy coated aluminum.
- Door Openings Adjustments: 85° to 125° opening



Stock No. (Specify Finish)

IV-70A Aluminum

Finishes: 3, 5, 10, 10B, 14, 15, 92, 716, W

IV-70B Brass

Finishes: 3, 10, 10B, 15, 15A, 26, 26D

FLOOR DOOR STOPS & HOLDERS—

Dome Stop

- For doors without threshold.
- Heavy-Duty Cast Dome Stops constructed of brass, bronze or aluminum.
- Gray, non-marring rubber bumper.
- Packed with wood screw and plastic anchor. Specify Tampin (TPN) or lead expansion shield (LS), if required. - **Special order only.**
- Meets ANSI/BHMA 156.6, L12141 for brass or bronze and L32141 for aluminum.

Overall Height	Base Height	Base Diameter
1"	3/16"	1-3/4" x 2" Oval



Stock No. (Specify Finish)

IV-436B

Finishes: 3, 5, 10, 10B, 15, 15A, 26, 26D, 28, 716

©ZIPF LOCK COMPANY

138_{v1}
(PL-26)

SUPER SPECIAL PRICING AVAILABLE ON ITEMS MARKED WITH ■ - SUPPLIES LIMITED - PLEASE INQUIRE.

DOOR STOPS & BUMPERS

See page 321 for finish descriptions.

FLOOR DOOR STOPS & HOLDERS— (cont'd)



Dome Stop

- For doors with threshold or undercut doors.
- Heavy-Duty Cast Dome Stops constructed of brass, bronze or aluminum.
- Gray, non-marring rubber bumper.
- Packed with wood screw and plastic anchor, specify Tampin (TPN) or lead expansion shield (LS), if required. - **Special order only.**
- Meets ANSI/BHMA 156.6, L12141 for brass or bronze and L32141 for aluminum.

Overall Height	Base Height	Base Diameter
1-3/8"	9/16"	1-3/4" x 2" Oval



Stock No. (Specify Finish)
IV-438B

Finishes: 3, 5, 10, 10B, 15, 15A, 26, 26D, 28

Floor Stops

- Designed to blend well with all types of construction and provide a minimum of hindrance to cleaning efforts.
- Accommodates door undercut up to 1-1/2".
- Heavy-Duty cast brass or aluminum construction.
- Non-marring rubber bumper.
- Packed with expansion shield and tampin.
- Meets ANSI/BHMA 156.16, L12131 for brass and L32131 for aluminum.

Overall Height	Base Height	Base Depth
2-1/8"	2-7/8"	1-5/8"




Stock No. (Specify Finish)
IV-FS441

Finishes: 3, 10, 10B, 15, 15A, 26, 26D

Floor Stops

- Burnished wrought steel.
- Soft, resilient gray rubber.
- For undercut doors up to 1-1/2".
- Packed with screws and plastic anchors.

Overall Height	Base Size
2-5/8"	1-1/2" W x 2-3/4" L



Stock No.
IV-FS434 2C

Finishes: 2C

Kick Down Holders

- Units provide simple hold and release, activated with a touch of the foot.
- Cast brass or aluminum construction.
- Non-marring rubber shoes have corrugated bottoms to provide secure grip and a shank which forms its own thread when screwed into threaded cavity of holder. When worn, shoes are easily replaced (special order).
- Door-to-floor clearances of 2" or less.
- Meets ANSI/BHMA 156.16, L11382 for brass and L31382 for aluminum.

Door-to-Floor Clearance	Plate Height	Plate Width
2" or less	1-3/4"	1-3/4"



Stock No. (Specify Finish)
IV-455A


Finishes: 3, 5, 10

IV-455MB

Finishes: 3, 5, 10, 10B, 15, 26D

Automatic Door Holders

- Automatic door holders ideal for heavy-traffic situations that require a simple, Hold-Open device.
- Cast brass construction.
- Holds door 3-3/4" from wall.
- Recommended installation is holder on door and strike on wall.
- Holder position on door is adjustable.
- Holder is tapered to prevent "child riding".
- Meets ANSI/BHMA 156.16, L11291 for brass.

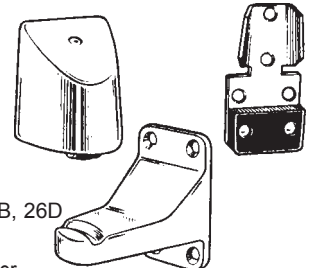

Stock No.
IV-495B

Finishes: 10B, 26D

US3, 4, 10, 26 Available by special order

©ZIPF LOCK COMPANY

SUPER SPECIAL PRICING AVAILABLE ON ITEMS MARKED WITH ■ - SUPPLIES LIMITED - PLEASE INQUIRE.

319v1
(PL-26)

DOOR STOPS & BUMPERS


See page 321 for finish descriptions.

WALL BUMPERS—



Concave Rubber Bumper

- Constructed in heavy-duty cast brass or aluminum base.
- Special retainer cup makes rubber tamper resistant.
- The IV-WS402CCV unit is designed with a concave rubber bumper which avoids damage to locks with projecting buttons and is packed with screw and drywall anchor.
- IV-WS402CCV meets ANSI/BHMA 156.16 L12251 for brass and L32251 for aluminum.
- Dimensions: Base Diameter: 2-1/2", Base Thickness: 3/8", Projection: 1"

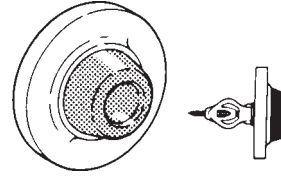


Stock No. (Specify Finish)
IV-402 1/2B

Finishes: 3, 5, 10B, 15, 26, 26D, 28

Convex Rubber Bumper

- Constructed in heavy-duty cast brass or aluminum base.
- Special retainer cup makes rubber tamper resistant.
- The IV-WS402CVX unit is designed with a convex rubber bumper packed with screw and drywall anchor.
- IV-WS402CVX meets ANSI/BHMA 156.16 L12101 for brass and L32101 for aluminum.
- Dimensions: Base Diameter: 2-1/2", Base Thickness: 3/8", Projection: 1"

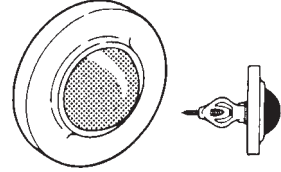


Stock No. (Specify Finish)
IV-402B

Finishes: 3, 10B, 15A, 26, 26D, 28

Compact Size Convex Rubber Bumper

- Constructed in cast brass.
- Compact size.
- Totally concealed mounting discourages vandalism or tampering.
- Unit furnished with grey convex rubber bumper.
- Packed with sheet metal screw, rawl plug and brad.
- Dimensions: Diameter: 1", Projection: 17/32"




Stock No. (Specify Finish)
IV-404B

Finishes: 3, 5, 10B, 15, 15A, 26, 26D

Economical Concave Rubber Bumper

- Constructed in sturdy yet economical wrought base of brass, aluminum or stainless steel construction.
- Feature concealed tamper-proof mounting.
- Shipped factory preassembled backplate to reduce installation cost.
- Easy installation by inserting screwdriver through small hole in rubber.
- The IV-WS407CCV unit is designed with a concave rubber bumper which avoids damage to locks with projecting buttons and is packed with screw and drywall anchor.
- IV-WS407CCV meets ANSI/BHMA 156.16 L22251 for brass and L42251 for aluminum, and L52251 for stainless steel.
- Dimensions: Base Diameter: 2-1/2", Base Thickness: 3/8", Projection: 1"

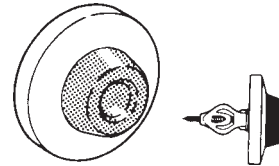


Stock No. (Specify Finish)
IV-407 1/2B

Finishes: 3, 5, 10B, 15, 15A, 26D, 28, 32D, 716

Economical Convex Rubber Bumper

- Constructed in sturdy yet economical wrought base of brass, aluminum or stainless steel construction.
- Feature concealed tamper-proof mounting.
- Shipped factory preassembled backplate to reduce installation cost.
- Easy installation by inserting screwdriver through small hole in rubber.
- The IV-WS407CVX unit is designed with a convex rubber bumper packed with screw and drywall anchor.
- IV-WS407CVX meets ANSI/BHMA 156.16 L22201 for brass, L42101 for aluminum and L52101 for stainless steel.
- Dimensions: Base Diameter: 2-1/2", Base Thickness: 3/8", Projection: 1"

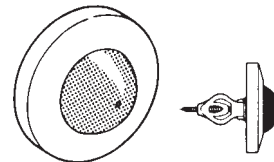

Stock No. (Specify Finish)
IV-407B

Finishes: 3, 5, 10, 10B, 15, 15A, 26, 26D, 28, 32D

©ZIPF LOCK COMPANY

DOOR STOPS & BUMPERS


See page 321 for finish descriptions.

WALL BUMPERS— (cont'd)



Adhesive-Backed Rubber Bumper

- Adhesive-backed wall door stop for use on clean, smooth, flat surfaces only.
- Non-marring rubber available in gray or white.
- Concave design permits knob to strike stop without damaging or engaging lock mechanism.
- Dimensions: Base Diameter: 1-7/8", Base Thickness: 3/8", Projection: 1-1/16"




Stock No. (Specify Finish)
IV-411R-W
 Finishes: W-White Rubber

WALL STOP—

Wall Stop

- Constructed in brass or aluminum.
- Ideal for interior or exterior use.
- Non-marring rubber tip.
- Furnished with 3 mounting holes for drywall mounting.
- Packed with wood screws.
- Meets ANSI/BHMA 156.16, L12011 for brass and L32011 for aluminum.
- Dimensions: Base Diameter: 2-1/4", Projection: 3-11/16"



Stock No. (Specify Finish)
IV-447B
 Finishes: 3, 10, 10B, 15, 15A, 26, 26D, 28

—FINISHES—

Ives:

- US-3** Bright Brass, clear coated
- US-4** Satin Brass, clear coated
- US-5** Antique Brass, clear coated
- US-10** Satin Bronze, clear coated
- US-10B** Oil Rubbed Bronze
- US-15** Satin Nickel, clear coated
- US-15A** Antique Nickel, clear coated
- US-26** Bright Chrome
- US-26D** Satin Chrome
- US-27** Satin Aluminum, clear anodized alum.
- US-28** Satin Aluminum, clear anodized.
- US-32D** Satin Stainless Steel
- US-716** Aged Bronze
- 2C** Zinc Plated
- 3AL** Plated Bright Brass, clear coated
- 14** Bright Nickel Plated, clear coated
- 92** Aluminum clear coated
- W** White Epoxy Coated

Cal Royal:

- US-3** Bright Brass
- US-4** Satin Brass
- US-5** Antique Brass
- US-10** Satin Bronze
- US-10B** Oil Rubbed Bronze
- US-15** Satin Nickel
- US-15A** Satin Nickel Oxidized
- US-26** Bright Chrome
- US-26D** Satin Chrome
- US-32D** Satin Stainless Steel
- DURO** Duronodic

Don Jo:

- 605** Bright Brass
- 609** Antique Brass
- 613** Oil Rubbed Bronze
- 619** Satin Nickel
- 620** Antique Nickel
- 625** Bright Chrome
- 626** Satin Chrome
- 630** Satin Stainless Steel
- AL** Sprayed Aluminum
- BP** Brass Plated

©ZIPF LOCK COMPANY

SUPER SPECIAL PRICING AVAILABLE ON ITEMS MARKED WITH ■ - SUPPLIES LIMITED - PLEASE INQUIRE.

321_{v1}
 (PL-26)